

## BELMONDO® Horsewalker, Motion

### Prerequisites:




#### Ground:

- Paved (concrete, asphalt, ...)
- No holes
- No ridges
- Max. 2% slope


#### Mats:

Even temperature:  
min. 5°C to max. 30°C  
(store accordingly!)




### You will need:


#### Measuring:




#### Marking:



#### Cutting:

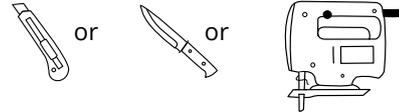

#### Connecting puzzle:



### Compatibility with vehicle traffic


Comply with the BELMONDO® vehicle traffic specifications!



**Tip:** With a **new construction**, it can be advantageous to install the mats first, then to erect the facility and finally to cut out pockets around posts / pillars.

## 1 Check width and course of the walking surface and determine the mat position


**Tip:** The mats should be placed in a suitable ring shape with an equal distance (min. 2 cm) to both the outer and the inner edge

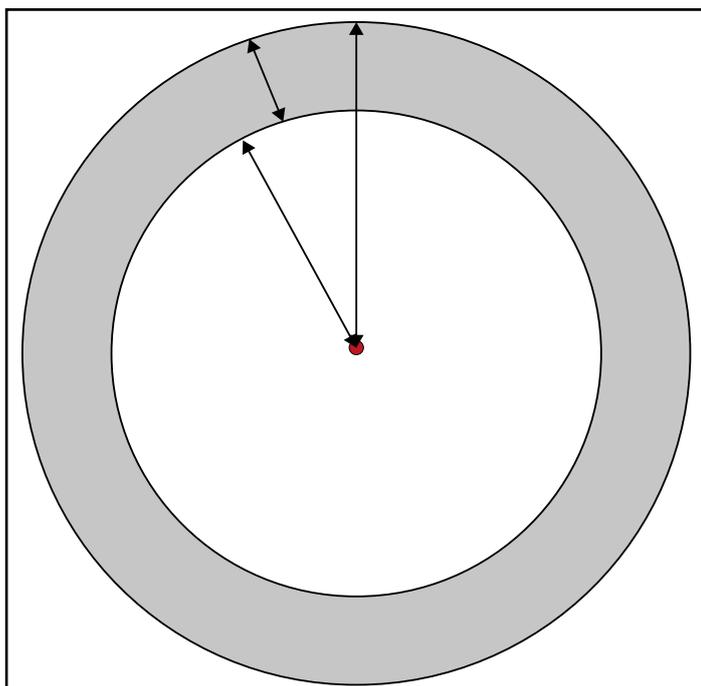

### Tip:


- Find the center.
- Starting from the center, measure the walking surface (e.g. using a string).
- On the basis of the walking surface width and the mat length, establish equal distances to both the outer and the inner edge and mark them evenly all the way round.

Mat width

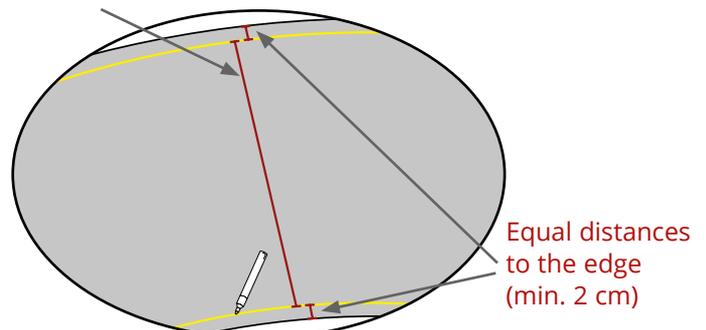


## 2 Install mats

**i** Start with the first mat in a suitable place:  
e.g. first side edge lies against a post / pillar

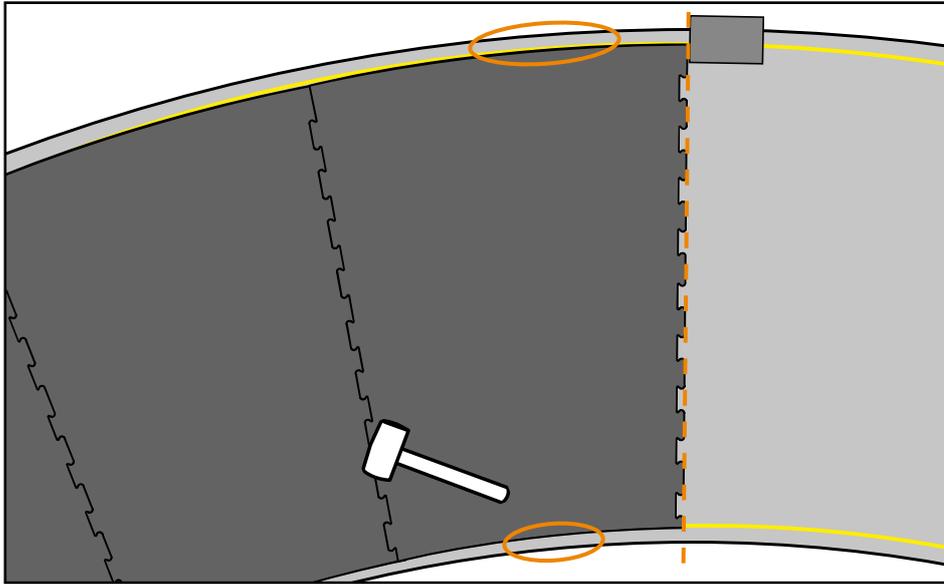


Join the mats

**i** **Tip:**  
First, install and interconnect 3 mats, then align the distances to the outer and the inner edge to prevent the mat ring being skewed.

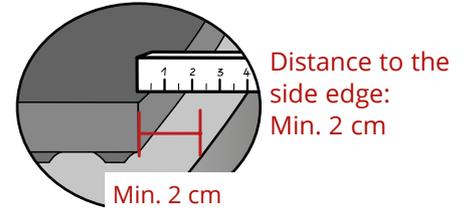

**i** **Tip:**  
For heavily used areas (e.g. entrance), install whole mats (not a puzzle interlock system if possible!)

## 3 Adapt

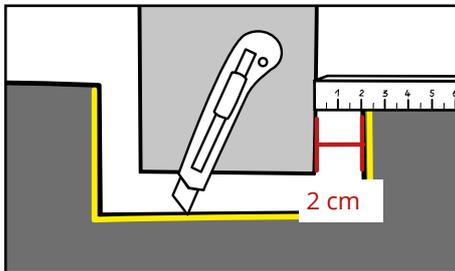


If necessary, cut mats to fit

Cut out the pocket 2 cm bigger

**i** **Tips for cutting:**


- Moisten the blade slightly
- Bend the mats / pull them apart slightly
- Possibly lay a board underneath - score - cut



- Use pliers to pull small pieces apart

### Facilities without outer boundary:


Frame the mat ring

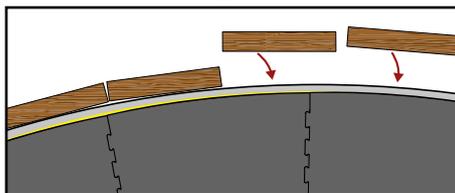

Attach the outer boundary (e.g. using wood)

Keep 2 cm distance to the outer boundary!

Or:

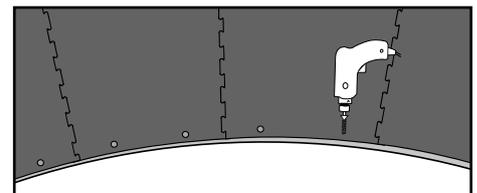

Fix twice per mat at the inner edge

**i** Appropriate installation may differ due to local conditions. Therefore, the manufacturer shall not be liable for installation!